


"I" Beams

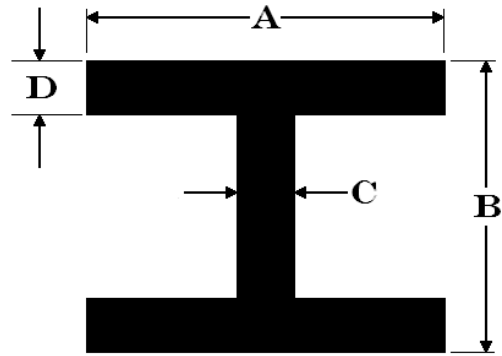

DIE NO.	A	B	C	D	CORNERS	WT/FT
8707	0.625	0.309	0.045	0.045	.045 R.	0.078
S11304	1.075	1.890	0.070	0.070	SQUARE	0.316
8760	1.125	0.625	0.125	0.062	.015 R.	0.242
3075	1.240	2.375	0.093	0.050	.031 R.	0.518
S12943	1.250	1.680	0.070	0.070	0.010	0.342
S11324	1.344	1.124	0.093	0.093	.015 R.	0.406
S13148	1.500	1.500	0.060	0.125	.015R	0.540
2872	1.500	2.625	0.150	0.150	.010 R.	0.995
4620	1.500	3.500	0.100	0.110	.110 R.	0.832
S12942	1.750	1.750	0.070	0.070	.010R	0.432
8348	1.750	3.420	0.055	0.055	.015 R.	0.449
1088	2.000	1.143	0.064	0.064	SQUARE	0.385
S13904	2.660	4.000	0.190	AMERICAN STD.	0.031	2.598
S13215	3.110	1.710	0.060	0.085	0.015	0.743
S13407	3.170	1.740	0.070	0.095	FULL R.	0.858
S13050	3.210	1.710	0.060	0.060	0.010	0.577
S13149	3.210	1.710	0.060	0.085	0.015	0.766
S13905	3.330	6.000	0.230	AMERICAN STD.	0.031	4.244